

ring

Base Station Z-Wave Technical Manual



Ring Base Station

Adding Sensor to a Z-Wave Network

Ring Motion Sensor can be added via smart start or via classic inclusion mode –

Smart Start Inclusion Steps:

1. Initiate add device flow in the Ring Alarm mobile application – Follow the guided add flow instructions provided in the application
2. Scan the QR code found on the package of the device or the QR code found on the back of the device

Classic Inclusion Steps:

1. Initiate add device flow in the Ring Alarm mobile application – Follow the guided add flow instructions provided in the application
2. Select add manually
3. Select Z-wave and select Add
4. Enter learn mode on the joining device

Ring Base station – Learn Mode


Adding Base station to a Z-Wave Network

Ring Base station can be added via classic inclusion mode –

Classic Inclusion Steps:

1. Start inclusion mode on the primary controller
2. From the application's UI, navigate to controller's device setting screen -> select Advance options -> Select Z-wave from "Protocol Adapters" and Select "Learn Mode" – DSK will be displayed (refer to the picture below)
3. Select "Begin Learn Mode" in the UI
4. When the inclusion process is complete, the LED on the base station will be solid blue

Joining another Z-wave network via learn mode is available only when the base station is not already paired to any other devices

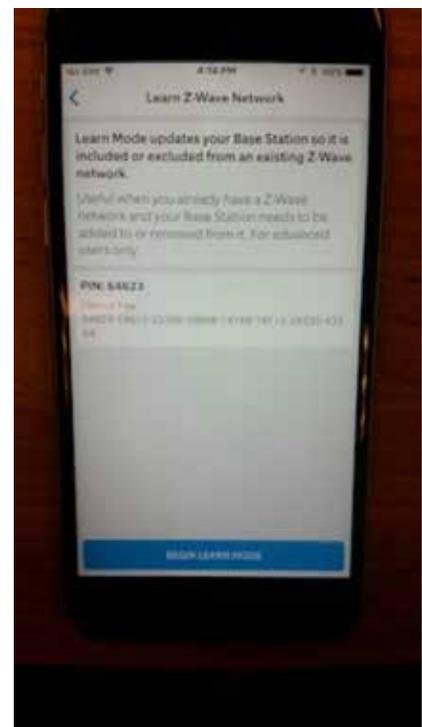

Removing a Base station to a Z-Wave Network

Exclusion Instructions

1. Start exclusion mode on the primary controller
2. From the application's UI, navigate to controller's device setting screen -> select Advance options -> Select Z-wave from "Protocol Adapters" and Select "Learn Mode" – DSK will be displayed
3. Select "Begin Learn Mode" in the UI
4. When the exclusion process is complete, the LED on the base station will be solid blue

Ring Base station – Lifeline

Association

This base station has Group 1 is the "Lifeline" group, which can hold one device. Base station will send device reset locally notification to this group.

Ring Base Station – Reset

Factory Default Instructions

1. Launch Ring app (iOS or Android)
2. Navigate to Base Station Setting: Devices à Alarm Base Station à Tap on gear icon located on top right-hand corner
3. Navigate to Advanced Options à Z-Wave
4. Tap "Reset Z-Wave Network" and Select "Reset"

Warning: This process is irreversible. All your Z-Wave devices will be removed from your Base Station. You will have to manually reset and re-add each device to rebuild your network.

Use this procedure only in the event that the network primary controller is missing or otherwise inoperable.

To review your warranty coverage, please visit www.ring.com/warranty.

© 2020 Ring LLC or its affiliates.

Ring, Always Home, and all related logos are trademarks of Ring LLC or its affiliates.